


ReForm Memory

Product description

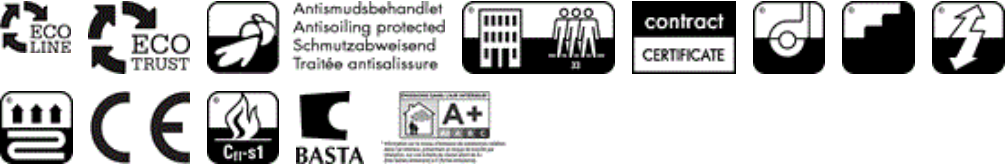

ege[®]

design · quality · respect

| Product description | Methods | Product data |
|------------------------|------------------|-----------------------------------|
| Construction | | |
| Structure | ISO 2424 | Tufted loop pile |
| Gauge | ISO 2424 | 1/12 |
| Pile material | DIR 96/73, 96/74 | 100% Recycled Econyl Polyamide |
| Coloration | - | Millitron |
| Backing | eTL | Ecotrust 350, 100% recycled |
| Dimensions | ISO 3018 | 48x48/96x96 cm |
| Dimensional stability | EN 986 | <0,2% |
| Total thickness | . | 0.34" |
| | ISO 1765 | Ca. 8,5 mm. |
| Surface pile thickness | ISO 1766 | Ca. 2,5 mm - 4,0 mm. |
| Tufts | ISO 1763 | Ca. 213.000 pr.m2 |
| Total carpet weight | . | 97.35 oz./yd2 |
| | ISO 8543 | Ca. 3.300 g/m2 |
| Pile yarn weight | eTL | 950 g/m2 |
| | . | 28.03 oz./yd2 |
| Surface pile density | ISO 8543 | Ca. 0,175 g/cm3 |
| edge soil protection | eTL | Yes |

Performance ratings

| | | |
|--------------------------------|------------------------------------|-----------------------------|
| Performance areas | EN 1307 | Class 33 Commercial - Heavy |
| Wear guarantee | eTL | Contract certificate |
| Performance areas | Gulvbranchen | Klasse 33 |
| Castor chair suitability | EN 985 | Yes, constant use |
| Suitable for use on stairs | EN 1963 | Yes |
| Static control | eTL | Permanently antistatic |
| Body walking test | ISO 6356 | Antistatic |
| Acou.insu. from impact noise | EN ISO 717-2 | 25 dB |
| Acoustical absorption | ISO 354 | 0,25 aW |
| Suitable for underfloorheating | ISO 8302 | Yes |
| Light reflectance | eTL | Testreport |
| Colour fastness to Light | ISO 105-B02 | >5 |
| | AATCC 16 | 5.0 |
| Colour fastness to rubbing wet | EN ISO 105-X12 | >3 |
| | AATCC 165 | 5.0 |
| Colour fastness to Rubbing Dry | EN ISO 105-X12 | >3-4 |
| | AATCC 165 | 5.0 |
| Colourfast. to Water Patterned | EN ISO 105-E01 | >4 |
| Cleaning | AATCC 138 | 5.0 |
| Colour fastness to Ozone | AATCC 129 | 4.0 |
| Colour fast.Oxides of Nitrogen | AATCC 164 | 4.0 |
| Other performance tests | ASTM D5252 Hexapod | 4.0/ 4.5 |
| | - | Commercial - Heavy |
| | AATCC 134 Electrostatic propensity | 3.5 kV |

Safety & Environment

| | | |
|----------------|----------|------------------------|
| CE Labeling | EN 14041 | Certified |
| EC Certificate | EN 14041 | 2531-CPR-CXA10017C ECT |

| Product description | Methods | Product data |
|---------------------|--------------------------------|-----------------|
| CE Labeling | Declaration of Performance | DOP 9711-17CECT |
| Fire classification | ASTM E-648 | Class 1 |
| | ASTM E662 Smoke Density | <450 |
| | ASTM D2859 Surface Flamm. | Pass |
| | EN13501-1 euro class | Cfl-s1 |
| | Indoor air | DIM Certifikat |
| Environment | BASTA | Registered |
| | Green Label Plus | Approved |
| | Emissions dans l'air intérieur | A+/A+ |
| | Recycled Content, ISO 14021 | Ca. 14 % |
| | Recycled Content for LEED | Ca. 14 % |
| | LEED | Qualified |

Guides

| | | |
|------------------------------|-------------------------|----------|
| Installation+adhensive guide | DK | Dansk |
| | N | Norsk |
| | S | Svensk |
| | GB | English |
| | D | Deutsch |
| | F | Francais |
| | Cleaning, stain removal | DK |
| N | | Norsk |
| S | | Svensk |
| GB | | English |
| D | | Deutsch |
| F | | Francais |

Manufacturer

| | | |
|-----------------------|-----------|-------------------------------|
| Factory certification | ISO 9001 | Audited and verified by BVC |
| | ISO 14001 | Audited and verified by BVC |
| | EMAS | Audited and verified by BVC |
| | OHSAS | Audited and verified by BVC |
| | DS 49001 | Audited and verified by BVC |
| | CRuk | Member of Carpet Recycling UK |
| | TransQ | Qualified |